


PrevaLED Flat AC MA

Light Engine e Moduli Spot, Down e Wallmount

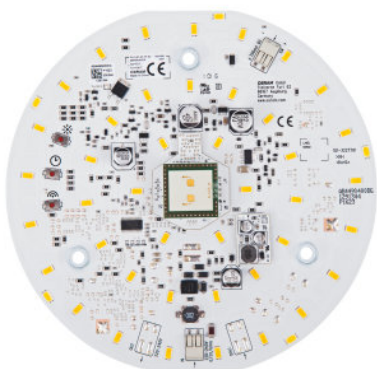

Aree applicative

- Corridoi
- Scale
- Pianerottolo
- Corridoi

Vantaggi prodotto

- Elevata affidabilità
- Facile da usare
- Forma ottimizzata per una semplice gestione termica
- Possibilità di realizzare apparecchi sottili ed efficienti
- Luce di qualità superiore grazie alla modulazione ridotta
- 5 anni di garanzia

Caratteristiche prodotto

- Master con sensore RF integrato (movimento, dimmerazione, spegnimento automatico con luce diurna)
- Progettato per apparecchi a parete e soffitto, con distribuzione diffusa della luce
- Alternativa LED a basso costo alle soluzioni CFL a parete e a soffitto
- Alimentatore integrato nella piastrina LED
- Diametro disponibile: 170 mm, 240 mm
- Temperature di colore disponibili: 3.000 K o 4.000 K
- Disponibile con flusso luminoso: 1500 lm, 2500 lm

Scheda della famiglia di prodotto

Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica

Testo delle specifiche

- Installation by qualified electrician only.
 - Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
 - Complies with IEC/EN 62031
 - Complies with IEC/EN 61547
 - Complies with EN 55015, CISPR 15
 - Complies with IEC/EN 62717
 - not relevant
 - Electrical contact is achieved with the contact cables or the terminals of the module. Please refer to the technical data for maximum number of LED modules that can be operated on one control gear.
 - Pay attention to polarity! Wrong polarity can cause destruction or malfunction of the module.
 - Conducting paths on the circuit board must not be damaged or destroyed during installation.
 - The LED module itself and all its components must not be stressed mechanically.
 - For optimal cooling a thermal interface material should be applied between LED module and heat sink.
 - The module must not be attached to wood or other flammable materials.
 - Protect against splashes!
 - The module, as manufactured, has no inherent protection against corrosion. It is the user's responsibility to provide suitable protection against corrosive agents, such as moisture, condensation and other harmful elements.
 - The product implemented control components are not designed for removal.
-

Supporto tecnico e di vendita

Supporto tecnico e di vendita www.osram.it

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Referenze/links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit [https://](https://www.inventronics-light.com/multilevel-guarantees)

► www.inventronics-light.com/multilevel-guarantees

Scheda della famiglia di prodotto

Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.