

LINEARlight FLEX Diffuse Side

– Moduli LED per applicazioni professionali e industriali



Caratteristiche prodotto

– Long operational length per single power feed up to 10 m

Vantaggi prodotto

- IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP67 connector with built-in protection against liquids penetrating through the wires into the LED strip

Aree applicative

- Insegne luminose e illuminazione pubblicitaria



Scheda della famiglia di prodotto

Dati tecnici

Descrizione del prodotto	Dati elettrici	Dati fotometrici	Dimensioni e peso			
	Potenza nominale al metro	Standard Deviation of Color Matching	Peso prodotto	Altezza	Larghezza	Lunghezza
LFD400S -G2-824-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD400S -G2-827-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD400S -G2-830-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD400S -G2-840-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD400S -G2-924-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD400S -G2-927-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD400S -G2-930-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD400S -G2-940-10	8,9 W	≤3 sdc	1900,00 g	10,80 mm	14,1 mm	10000,0 mm
LFD600S -G2-824-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD600S -G2-827-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD600S -G2-830-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD600S -G2-840-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD600S -G2-924-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD600S -G2-927-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD600S -G2-930-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD600S -G2-940-06	13,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD1000S -G2-824-04	21 W	≤3 sdc	695,00 g	10,80 mm	14,1 mm	4000,0 mm
LFD1000S -G2-827-04	21 W	≤3 sdc	695,00 g	10,80 mm	14,1 mm	4000,0 mm
LFD1000S -G2-830-04	21 W	≤3 sdc	695,00 g	10,80 mm	14,1 mm	4000,0 mm
LFD1000S -G2-840-04	21 W	≤3 sdc	695,00 g	10,80 mm	14,1 mm	4000,0 mm
LFD1000S -G2-927-04	21 W	≤3 sdc	695,00 g	10,80 mm	14,1 mm	4000,0 mm
LFD1000S -G2-930-04	21 W	≤3 sdc	695,00 g	10,80 mm	14,1 mm	4000,0 mm
LFD1000S -G2-940-04	21 W	≤3 sdc	695,00 g	10,80 mm	14,1 mm	4000,0 mm
LFD400S -G1-830-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD400S -G1-835-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD400S -G1-840-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD400S -G1-850-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000,0 mm
LFD400S -G1-865-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD400S -G1-924-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD400S -G1-935-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD400S -G1-940-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD400S -G1-965-06	7,2 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD600S -G1-840-06	11,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD600S -G1-865-06	11,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD600S -G1-924-06	11,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm
LFD600S -G1-935-06	11,5 W	≤3 sdc	1040,00 g	10,80 mm	14,1 mm	6000 mm

Scheda della famiglia di prodotto

	Dati di prodotto aggiuntivi		Dati logistici	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
Descrizione del prodotto	ID of contained light source [AGGR]	EAN sostitutivo	Codice prodotto di base	Date of Declaration
LFD400S -G2-824-10	LS_TRV_286433		85395100000	19-05-2023
LFD400S -G2-827-10	LS_TRV_286434		85395100000	02-06-2023
LFD400S -G2-830-10	LS_TRV_286435		85395100000	07-07-2023
LFD400S -G2-840-10	LS_TRV_286437		85395100000	07-07-2023
LFD400S -G2-924-10	LS_TRV_286439		85395100000	07-07-2023
LFD400S -G2-927-10	LS_TRV_286440		85395100000	07-07-2023
LFD400S -G2-930-10	LS_TRV_286441		85395100000	07-07-2023
LFD400S -G2-940-10	LS_TRV_286443		85395100000	21-04-2023
LFD600S -G2-824-06	LS_TRV_286445		85395100000	07-07-2023
LFD600S -G2-827-06	LS_TRV_286446		85395100000	19-05-2023
LFD600S -G2-830-06	LS_TRV_286447		85395100000	07-07-2023
LFD600S -G2-840-06	LS_TRV_286449		85395100000	07-07-2023
LFD600S -G2-924-06	LS_TRV_286451		85395100000	07-07-2023
LFD600S -G2-927-06	LS_TRV_286452		85395100000	07-07-2023
LFD600S -G2-930-06	LS_TRV_286453		85395100000	26-05-2023
LFD600S -G2-940-06	LS_TRV_286455		85395100000	07-07-2023
LFD1000S -G2-824-04	LS_TRV_286457		85395100000	07-07-2023
LFD1000S -G2-827-04	LS_TRV_286458		85395100000	07-07-2023
LFD1000S -G2-830-04	LS_TRV_286459		85395100000	06-07-2023
LFD1000S -G2-840-04	LS_TRV_286461		85395100000	07-07-2023
LFD1000S -G2-927-04	LS_TRV_286464		85395100000	07-07-2023
LFD1000S -G2-930-04	LS_TRV_286465		85395100000	07-07-2023
LFD1000S -G2-940-04	LS_TRV_286467		85395100000	07-07-2023
LFD400S -G1-830-06		4052899953628	853951000000	09-08-2023
LFD400S -G1-835-06			85395100000	09-08-2023
LFD400S -G1-840-06		4052899953635	853951000000	09-08-2023
LFD400S -G1-850-06			85395100000	02-06-2023
LFD400S -G1-865-06		4052899953642	853951000000	09-08-2023
LFD400S -G1-924-06			853951000000	21-04-2023
LFD400S -G1-935-06			85395100000	02-06-2023
LFD400S -G1-940-06			85395100000	02-06-2023
LFD400S -G1-965-06			85395100000	02-06-2023
LFD600S -G1-840-06		4052899500006	940540399000	09-08-2023
LFD600S -G1-865-06		4052899500044	853951000000	09-08-2023
LFD600S -G1-924-06			85395100000	09-08-2023
LFD600S -G1-935-06			85395100000	09-08-2023

Scheda della famiglia di prodotto

Descrizione del prodotto	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction
LFD400S -G2-824-10	4062172273992	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G2-827-10	4062172274012	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G2-830-10	4062172274036	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G2-840-10	4062172274074	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G2-924-10	4062172274111	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G2-927-10	4062172274135	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G2-930-10	4062172274159	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G2-940-10	4062172274197	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-824-06	4062172270618	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.

Scheda della famiglia di prodotto

Descrizione del prodotto	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction
LFD600S -G2-827-06	4062172270632	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-830-06	4062172270656	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-840-06	4062172270694	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-924-06	4062172270731	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-927-06	4062172270755	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-930-06	4062172270779	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-940-06	4062172270816	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD1000S -G2-824-04	4062172271097	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD1000S -G2-827-04	4062172271110	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.

Scheda della famiglia di prodotto

Descrizione del prodotto	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction
LFD1000S -G2-830-04	4062172271134	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD1000S -G2-840-04	4062172271172	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD1000S -G2-927-04	4062172271233	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD1000S -G2-930-04	4062172271257	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD1000S -G2-940-04	4062172271295	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-830-06	4052899581807	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-835-06	4062172001052	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-840-06	4052899581821	No declarable substances contained		
LFD400S -G1-850-06	4062172007658	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.

Scheda della famiglia di prodotto

Descrizione del prodotto	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction
LFD400S -G1-865-06	4052899581845	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-924-06	4062172025621	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-935-06	4062172025669	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-940-06	4062172025683	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-965-06	4062172025706	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-840-06	4052899582064	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-865-06	4052899582088	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-924-06	4062172025829	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-935-06	4062172025867	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.


Scheda della famiglia di prodotto

Descrizione del prodotto	Declaration No. in SCIP database
LFD400S -G2-824-10	9849d7f3-9e30-4c10-a093-103f144ce0c9
LFD400S -G2-827-10	6bf6cf39-4be4-4a2b-888f-9b33864f79a0
LFD400S -G2-830-10	e5b6b1da-8335-41eb-a063-219e9ff55b17
LFD400S -G2-840-10	548dfcdc-ef49-405a-a755-18d14e32f3ae
LFD400S -G2-924-10	2d776b0d-2be9-434d-8c6c-060176ca9b52
LFD400S -G2-927-10	f894de75-0eda-4dc1-aaaa-0201efc98aa3
LFD400S -G2-930-10	1a2cfb0e-d779-4b52-b347-6a387efc9e3e
LFD400S -G2-940-10	4ccfb56e-1d50-4a22-825a-c0e8f867f700
LFD600S -G2-824-06	d496b18a-7f9c-4baf-a8b1-4f55f5e37eca
LFD600S -G2-827-06	0b1ce07b-12c0-4d0f-94ad-6305c21fcd00
LFD600S -G2-830-06	e165b383-8ff3-41d9-8867-a50d6d58fe7e
LFD600S -G2-840-06	4d267f92-ae3-4aeb-b525-7270ea4a02e4
LFD600S -G2-924-06	c3fccac2-1d76-4a00-aeb3-e4cd7ced3962
LFD600S -G2-927-06	69fd7221-b45e-4691-811f-a73903f96efc
LFD600S -G2-930-06	4361f374-3b7e-4014-9eb7-b2e0def7076c
LFD600S -G2-940-06	f10c57b0-11a1-4522-b34a-ed01c0c0b414
LFD1000S -G2-824-04	3a3e6afd-a116-4d71-8253-4a8500842224
LFD1000S -G2-827-04	badac5ca-8cad-4d6b-a0d7-bd5cb6f200a9
LFD1000S -G2-830-04	0fe6df3d-adce-43a7-b16b-9443f56d72e0
LFD1000S -G2-840-04	4d8dc1de-fbd4-4c37-a6e8-a39f94d9ca5a


Scheda della famiglia di prodotto

Descrizione del prodotto	Declaration No. in SCIP database
LFD1000S -G2-927-04	a05814f5-34b9-4d83-8a58-6fbfb4c05f37
LFD1000S -G2-930-04	e9ead098-1d6e-4fef-8504-a12333836386
LFD1000S -G2-940-04	6fd499d9-28ca-4ff8-b0ef-8b39433f413b
LFD400S -G1-830-06	bcb7208c-7aa6-40c9-90c8-7f382f4ffdd6
LFD400S -G1-835-06	8991e81f-05cd-41ca-bfa3-5bb79eb31a90
LFD400S -G1-840-06	No declarable substances contained
LFD400S -G1-850-06	67e58a94-3b05-4b50-be0d-415a56898b6e
LFD400S -G1-865-06	cfb7ba5f-721c-4021-af44-ab2a68cc0e6a
LFD400S -G1-924-06	8cce7612-9dee-4bef-8811-654cb49fcfea
LFD400S -G1-935-06	d18738f6-79ee-4ef1-a3f0-b75b463b0cf7
LFD400S -G1-940-06	f9739da9-1daa-4792-905b-5a9ff5bc2410
LFD400S -G1-965-06	1f2a1687-2985-4012-aea3-af8ce86db0e8
LFD600S -G1-840-06	bde47b89-55b9-4060-b752-9c64ae38f841
LFD600S -G1-865-06	98f93c35-bc53-4a2e-81cd-255b825fd395
LFD600S -G1-924-06	8a7192ac-1cf9-465c-8864-7d95b5bd1196
LFD600S -G1-935-06	2bce05b9-7be2-4a5e-bc3d-fce5c3ce99c6

Scheda della famiglia di prodotto

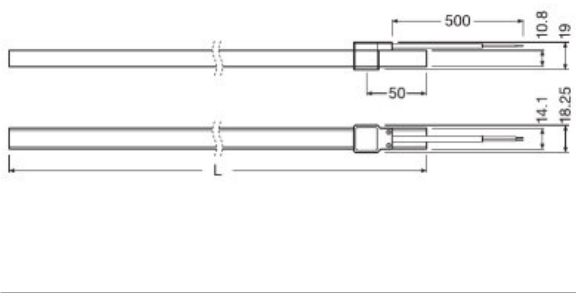

LINEARlight FLEX DIFFUSE Side line drawing

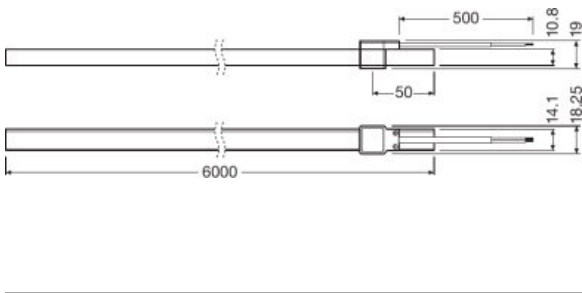

LINEARlight Flex Diffuse 400 and 600 SIDE

Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica

Testo delle specifiche

- not relevant
- not relevant
- not relevant
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Supporto tecnico e di vendita

Supporto tecnico e di vendita www.osram.it

Download dati

File	
	User instruction LINEARlight FLEX DIFFUSE
	Product Datasheet LINEARlight FLEX DIFFUSE Side_G2_Specification Sheet (EN)
	Brochure App Guide LINEARlight Flex Diffuse (EN)
	Brochure Light is freedom of design (EN)
	Certificati VDE ENEC CERTIFICATE 40052516 160823

Scheda della famiglia di prodotto

	Certificati LINEARlight Flex DP UL 4413809 200622
	Eulumdat LFD400S-G2-824-10_ldt
	IES data LFD400S-G2-824-10_IES
	Eulumdat LFD400S-G2-827-10_ldt
	IES data LFD400S-G2-827-10_IES
	Eulumdat LFD400S-G2-830-10_ldt
	IES data LFD400S-G2-830-10_IES
	Eulumdat LFD400S-G2-865-10_ldt
	IES data LFD400S-G2-865-10_IES
	Eulumdat LFD1000S-G2-924-10_ldt
	Eulumdat LFD400S-G2-927-10_ldt
	IES data LFD1000S-G2-924-10_IES
	IES data LFD400S-G2-927-10_IES
	Eulumdat LFD400S-G2-930-10_ldt
	IES data LFD400S-G2-930-10_IES
	Eulumdat LFD400S-G2-935-10_ldt
	IES data LFD400S-G2-935-10_IES
	Eulumdat LFD400S-G2-965-10_ldt
	IES data LFD400S-G2-965-10_IES
	Eulumdat LFD600S-G2-824-10_ldt
	IES data LFD600S-G2-824-10_IES
	Eulumdat LFD600S-G2-827-10_ldt
	IES data LFD600S-G2-827-10_IES

Scheda della famiglia di prodotto

	Eulumdat LFD600S-G2-830-10_ldt
	IES data LFD600S-G2-830-10_IES
	Eulumdat LFD600S-G2-840-10_ldt
	IES data LFD600S-G2-840-10_IES
	Eulumdat LFD600S-G2-924-10_ldt
	IES data LFD600S-G2-924-10_IES
	Eulumdat LFD600S-G2-927-10_ldt
	IES data LFD600S-G2-927-10_IES
	Eulumdat LFD600S-G2-930-10_ldt
	IES data LFD600S-G2-930-10_IES
	Eulumdat LFD600S-G2-940-10_ldt
	IES data LFD600S-G2-940-10_IES
	Eulumdat LFD1000S-G2-824-10_ldt
	IES data LFD1000S-G2-824-10_IES
	Eulumdat LFD1000S-G2-827-10_ldt
	IES data LFD1000S-G2-827-10_IES
	Eulumdat LFD1000S-G2-830-10_ldt
	IES data LFD1000S-G2-830-10_IES
	Eulumdat LFD1000S-G2-840-10_ldt
	IES data LFD1000S-G2-840-10_IES
	Eulumdat LFD1000S-G2-927-10_ldt
	IES data LFD1000S-G2-927-10_IES
	Eulumdat LFD1000S-G2-930-10_ldt

Scheda della famiglia di prodotto

	IES data LFD1000S-G2-930-10_IES
	Eulumdat LFD1000S-G2-940-10_ldt
	IES data LFD1000S-G2-940-10_IES
	User instruction LINEARlight FLEX DIFFUSE
	Product Datasheet LINEARlight FLEX DIFFUSE Side (EN)
	Certificati CB TEST CERTIFICATE DE-57743
	Dichiarazioni di conformità Flex Diffuse CE 3557934 221121
	Dichiarazioni di conformità 726048_Manufacturer Declaration_LINEARlight Flex Diffuse
	Eulumdat LFD400S-G1-830-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-830-06
	IES data LFD400S-G1-830-06 IES 28032022
	IES data IES data LFD400S-G1-830-06
	Eulumdat LFD400S-G1-835-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-835-06
	IES data LFD400S-G1-835-06 IES 28032022
	IES data IES data LFD400S-G1-835-06
	Eulumdat LFD400S-G1-840-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-840-06
	IES data LFD400S-G1-840-06 IES 28032022
	IES data IES data LFD400S-G1-840-06
	Eulumdat LFD400S-G1-850-06 LDT 28032022
	IES data LFD400S-G1-850-06 IES 28032022
	Eulumdat LFD400S-G1-865-06 LDT 28032022

Scheda della famiglia di prodotto

	Eulumdat Eulumdat LFD400S-G1-865-06
	IES data LFD400S-G1-865-06 IES 28032022
	IES data IES data LFD400S-G1-865-06
	Eulumdat LFD400S-G1-924-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-924-06
	IES data LFD400S-G1-924-06 IES 28032022
	IES data IES data LFD400S-G1-924-06
	Eulumdat LFD400S-G1-935-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-935-06
	IES data LFD400S-G1-935-06 IES 28032022
	IES data IES data LFD400S-G1-935-06
	Eulumdat LFD400S-G1-940-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-940-06
	IES data LFD400S-G1-940-06 IES 28032022
	IES data IES data LFD400S-G1-940-06
	Eulumdat LFD400S-G1-965-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-965-06
	IES data LFD400S-G1-965-06 IES 28032022
	IES data IES data LFD400S-G1-965-06
	Certificati EAC Certificate
	Certificati CB TEST CERTIFICATE DE-59261
	Eulumdat LFD600S-G1-840-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-840-06

Scheda della famiglia di prodotto

	IES data LFD600S-G1-840-06 IES 28032022
	IES data IES data LFD600S-G1-840-06
	Eulumdat LFD600S-G1-865-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-865-06
	IES data LFD600S-G1-865-06 IES 28032022
	IES data IES data LFD600S-G1-865-06
	Eulumdat LFD600S-G1-924-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-924-06
	IES data LFD600S-G1-924-06 IES 28032022
	IES data IES data LFD600S-G1-924-06
	Eulumdat LFD600S-G1-935-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-935-06
	IES data LFD600S-G1-935-06 IES 28032022
	IES data IES data LFD600S-G1-935-06

Scheda della famiglia di prodotto

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4062172273992	LFD400S -G2-824-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274012	LFD400S -G2-827-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274036	LFD400S -G2-830-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274074	LFD400S -G2-840-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274111	LFD400S -G2-924-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274135	LFD400S -G2-927-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274159	LFD400S -G2-930-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274197	LFD400S -G2-940-10	Cartone di spedizione 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172270618	LFD600S -G2-824-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172270632	LFD600S -G2-827-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172270656	LFD600S -G2-830-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g

Scheda della famiglia di prodotto

Dati logistici

4062172270694	LFD600S -G2-840-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172270731	LFD600S -G2-924-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172270755	LFD600S -G2-927-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172270779	LFD600S -G2-930-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172270816	LFD600S -G2-940-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172271097	LFD1000S -G2-824-04	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	9570.00 g
4062172271110	LFD1000S -G2-827-04	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	9570.00 g
4062172271134	LFD1000S -G2-830-04	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	9570.00 g
4062172271172	LFD1000S -G2-840-04	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	9570.00 g
4062172271233	LFD1000S -G2-927-04	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	9570.00 g
4062172271257	LFD1000S -G2-930-04	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	9570.00 g
4062172271295	LFD1000S -G2-940-04	Cartone di spedizione 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4052899581807	LFD400S -G1-830-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172001052	LFD400S -G1-835-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4052899581821	LFD400S -G1-840-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172007658	LFD400S -G1-850-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4052899581845	LFD400S -G1-865-06	Cartone di spedizione 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025621	LFD400S -G1-924-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025669	LFD400S -G1-935-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025683	LFD400S -G1-940-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025706	LFD400S -G1-965-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g

Scheda della famiglia di prodotto

Dati logistici

4052899582064	LFD600S -G1-840-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4052899582088	LFD600S -G1-865-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025829	LFD600S -G1-924-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025867	LFD600S -G1-935-06	Cartone di spedizione 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g

1)☒ codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

Accessori opzionali

Descrizione del prodotto	Nome dell'accessorio	Codice dell'accessorio
LFD400S -G2-824-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-827-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-830-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-840-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-924-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-927-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-930-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-940-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-824-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-827-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-830-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-840-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-924-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-927-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-930-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-940-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-824-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-827-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-830-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-840-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-927-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-930-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583

Scheda della famiglia di prodotto

LFD1000S -G2-940-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-830-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-835-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-840-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-850-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-865-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-924-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-935-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-940-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-965-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-840-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-865-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-924-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-935-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583

Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.