

Batten mount adapter

Qualified Bluetooth mesh D4i Module | Sistemi di gestione dell'illuminazione



Caratteristiche prodotto

- With/without Daylight and Occupancy Sensor DEXAL Module
- Control of DEXAL drivers or DALI drivers with additional DALI bus power supply

Vantaggi prodotto

- Secured product communication granted by ioXT and PSA Certificates


Aree applicative

- Uffici singoli
- Sale riunioni
- Aule scolastiche
- Scale
- Toilette

Scheda prodotto

Dati tecnici

Dimensioni e peso

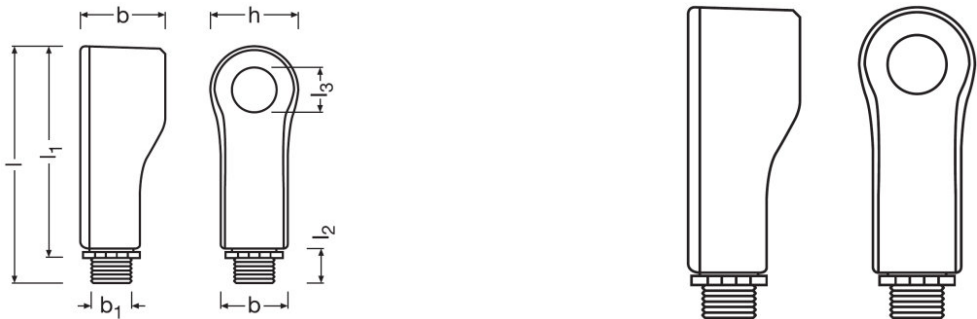

Lunghezza	119,3 mm
Peso prodotto	44,00 g

Caratteristiche

Tipo di installazione	Luminaire integration
-----------------------	-----------------------


Dati logistici

Codice prodotto di base	39269097900
-------------------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	21-07-2023
Primary Article Identifier	4062172271929
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	09df8a9e-9f6a-4bb2-b7bd-46dfceb31e6d

Scheda prodotto

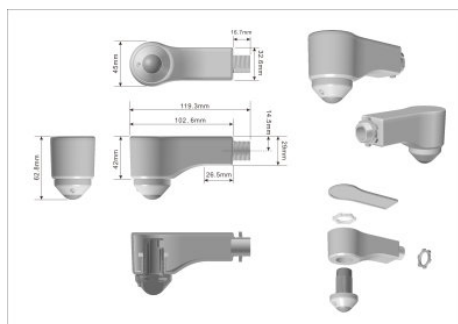

Batten mount adapter

Testo delle specifiche

- By integrating the device into a casing the wireless range could be affected, in particular by metal surfaces. Therefore, the wireless range needs to be verified after integration.
 - The device could be reset to factory default by placing a strong Neodym magnet (e.g. N35, d=6.35 mm x h=1.59 mm) near the corner of the bezel for 5 seconds.
 - The status LED of the device indicates following Network status. Fast blinking (Blue): Not connected to a network, Slow blinking (Blue); Connected to a network, Blink twice (Blue): Mesh package received, Long blink (Blue) Factory reset, Blink one (Red): Motion detected
 - The device has passed successfully the SILVAIR Testing process.
 - The device can be put into operation using the OSRAM HubSense Commissioning Tool (<https://platform.hubsense.eu>), subject to prior acceptance of the Terms of Use and the Privacy Policy.
- OSRAM may terminate or suspend the use of the HubSense Commissioning Tool at any time and for any or no reason in its sole discretion, even if access and use is continued to be allowed to others.
- The device complies with Bluetooth mesh Standard v1.0. It can also be used in 3rd party Bluetooth mesh network, that complies with this standard and that supports the mesh models of this device, and with certain 3rd party commissioning tools, that support the mesh models of this device. In order to ensure correct interoperability a verification with the 3rd party network components and the 3rd party commissioning tool is necessary in advance. Please contact OSRAM (support@hubsense.eu) to receive the actual list of supported models for this device.
 - OSRAM shall have no liability for any 3rd party commissioning tool and does not make any representations, express or implied, about the availability and/or performance of such commissioning tool.
 - OSRAM shall have no liability for and does not make any representations, express or implied, about the connectivity of OSRAM QBM products with any other products, that have passed the SILVAIR Testing process.

Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4062172271929	Batten mount adapter	Cartone di spedizione 50	400 mm x 295 mm x 285 mm	33.63 dm³	3084.00 g

1) Il codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

Clausola

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.