

LR-P-2000 -927-10S-BK-15-TB-G1

LINEARlight Rigid FINESSE |



Caratteristiche prodotto

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67 or Indoor IP43 versions available
- Large operating temperature range: from -30 ° to +50 ° Celsius
- Luminous flux: > 2000 lm/m; 1200 m/m; 900 lm/m
- Color uniformity ≤ 2 SDCM
- Lifetime up to 60.000 h L80B10; LM80 and LM79
- Large selection of color temperatures: 2400 K – 5000 K; CRI 80, CRI 90
- Dimmable by OPTOTRONIC LED driver from 0 % to 100 %
- Designed in Italy, made in Germany
- Durable, coated aluminum profile resistant to harsh environments: AMA

Vantaggi prodotto

- 15 lengths available to adapt to all conditions
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products
- Several installation accessories available



Scheda prodotto

Aree applicative

- Wall Grazing
- Ambient lighting
- Wall washing
- Illuminazione di gole
- Architectural integration

Scheda prodotto

Dati tecnici

Informazioni sul prodotto

Numero d'ordine	LR-P-2000-927-1
-----------------	-----------------

Dati elettrici

Tensione nominale	24,0 V
Accidental reverse input voltage protection up to	25 V


Dati fotometrici

Temperatura di colore	2700 K
Flusso luminoso	3300 lm
Intensità luminosa	5300 cd
Colore della luce (descrizione)	Bianco
Indice di resa cromatica Ra	> 90
Rendimento dell'apparecchio	0,76
Efficienza luminosa	76 lm/W

Dati illuminotecnici

Ampiezza fascio luminoso	10 °
--------------------------	------

Dimensioni e peso

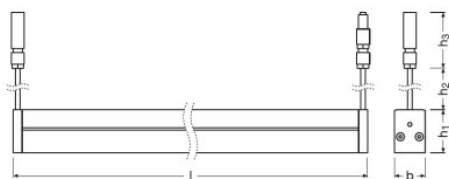

Lunghezza	0,0 mm
Larghezza	25,0 mm
Altezza	33,0 mm
Peso prodotto	1500,00 g
Peso prodotto	0

Colori e materiali

Scheda prodotto

Materiale del corpo	Alluminio
Colore del prodotto	Nero
Materiale della copertura	Policarbonato

Temperature e condizioni di utilizzo

Temperatura ambiente	-30...+50 °C
----------------------	--------------

Durata

Durata	60000 h
--------	---------

Caratteristiche

Dimmerabile	Sì
-------------	----

Certificati, Norme, Direttive

Grado di protezione	IP67
---------------------	------

Classificazioni specifiche del paese

Numero d'ordine	LR-P-2000-927-1
-----------------	-----------------


Dati logistici

Codice prodotto di base	940511909000
-------------------------	--------------


Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	27-05-2022
Primary Article Identifier	4062172144896
Declaration No. in SCIP database	In work


Distribuzione luminosa

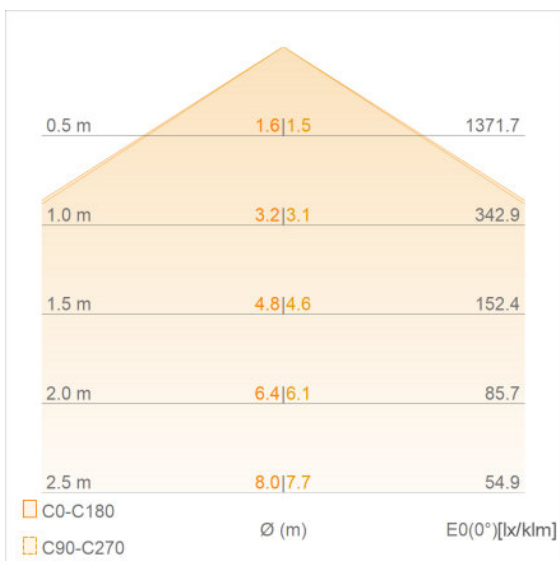


LRF-930-120D-G1 Illuminance Cone Diagram

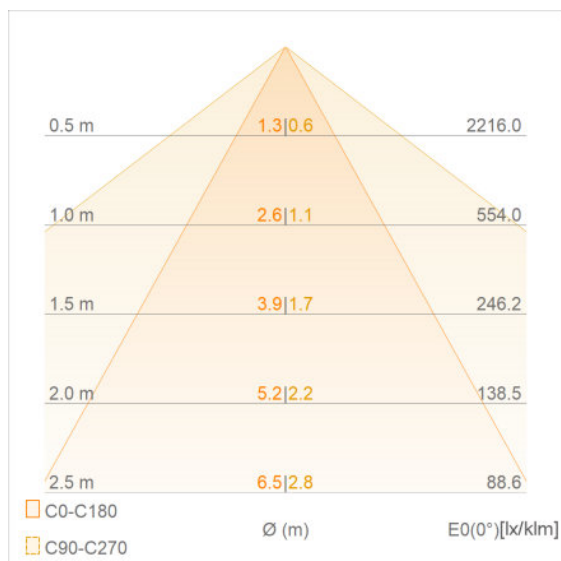

LRF-930-90T-G1 Illuminance Cone Diagram

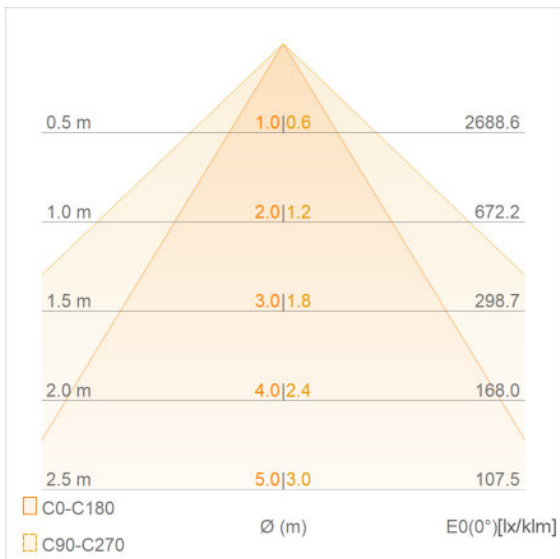


LRF-930-60S-G1 Illuminance Cone Diagram

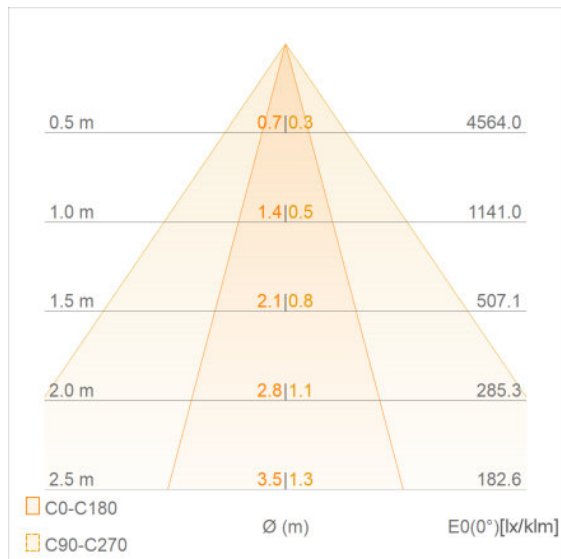


LRF-930-30S-G1 Illuminance Cone Diagram


Scheda prodotto

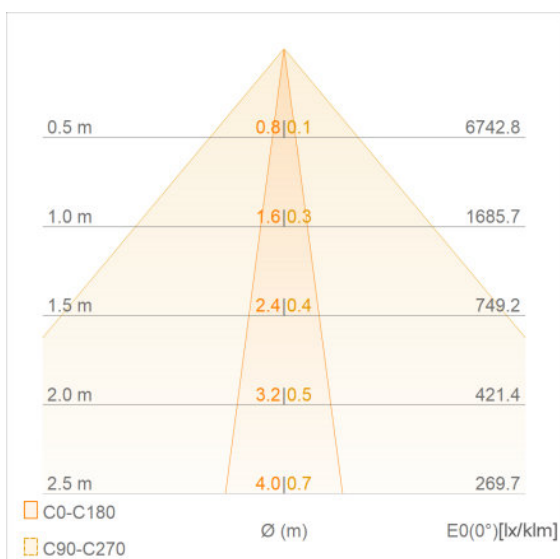

LRF-930-10S G1 Illuminance Cone Diagram

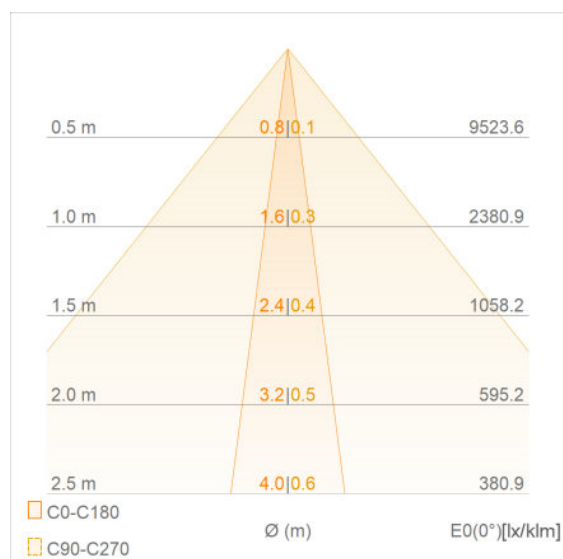

LRF-930-10B-G1 Illuminance Cone Diagram

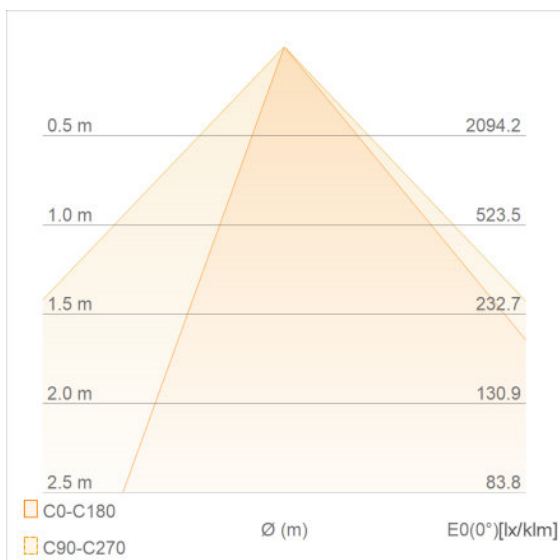

LRF-930-WW-G1 Illuminance Cone Diagram

[Download dati](#)

File

Scheda prodotto


	User instruction FINESSE
	User instruction FINESSE RGB RGBW
	Product Datasheet LINEARlight RIGID FINESSE (EN)
	Product Datasheet LINEARlight RIGID FINESSE RGB (W) (EN)
	Brochure Light is awesome - LINEARlight Rigid FINESSE (EN)
	Certificati Finesse LR P fixed CB 04032022
	Certificati Finesse LR P fixed D 04032022
	Certificati Finesse LR P fixed ENEC
	Certificati Finesse LR P floodligh CB 04032022
	Certificati Finesse LR P floodligh D 04032022
	Certificati Finesse LR P floodligh ENEC 04032022
	Dati CAD LRF-P-2000-ABC-XX-YY-02-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-03-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-04-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-05-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-06-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-07-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-08-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-09-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-10-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-11-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-12-ZZ-G1 STEP 070420
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-13-ZZ-G1 STEP 070420

Scheda prodotto

	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-14-ZZ-G1
	Dati CAD 3-dim LRF-P-2000-ABC-XX-YY-15-ZZ-G1
	Eulumdat LR-x-2000-930-10B-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-10S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-120D-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-30S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-60S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-90T-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-WW-xx-10-xx-G1 LTD
	IES data LR-x-2000-930-10B-xx-10-xx-G1 IES
	IES data LR-x-2000-930-10S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-120D-xx-10-xx-G1 IES
	IES data LR-x-2000-930-30S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-60S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-90T-xx-10-xx-G1 IES
	IES data LR-x-2000-930-WW-xx-10-xx-G1 IES

Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4062172144896	LR-P-2000 -927-10S-BK-15-TB-G1	Cartone di spedizione 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g

1)  codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

Scheda prodotto

Clausola

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.