


BackLED Area Tunable White

Moduli LED per insegne luminose e retroilluminazione

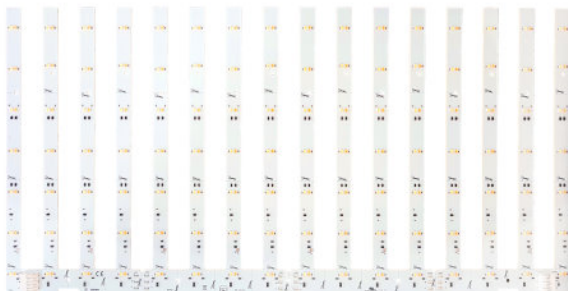

Caratteristiche prodotto

- Moduli LED a tensione costante 24 V
- Tunable white 2700K-6500K for dynamic white applications
- Indice di resa cromatica $R_a > 90$
- Pitch LED costante anche nei punti di connessione tra i circuiti
- Cuttable, single board for an exact fit in any installation
- Product only compatible with DALI DT8 drivers (TW) or OSRAM BLE devices with OSRAM TW lamp profiles

Vantaggi prodotto

- Luce uniforme per gli apparecchi che illuminano superfici estese
- Easy wiring with push-in connectors
- Basso consumo energetico e minore emissione di calore
- Optimal operation on OPTOTRONIC 24VDC and 24VDC dimmable power supplies

Aree applicative

- Illuminazione di grandi superfici
- Soffitti luminosi
- Strutture ricettive, hotel, ristoranti
- Simulazione della luce naturale

Scheda della famiglia di prodotto

Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica

Testo delle specifiche

- This product must be operated by a DALI DT8 power supply or OSRAM BLE devices in TW profile
-

Supporto tecnico e di vendita

Supporto tecnico e di vendita www.osram.it

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
 - Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
 - In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.
 - Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.
-

Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.