


## TEC FLEX Colormix IP00

LED modules flexible, strips, colored

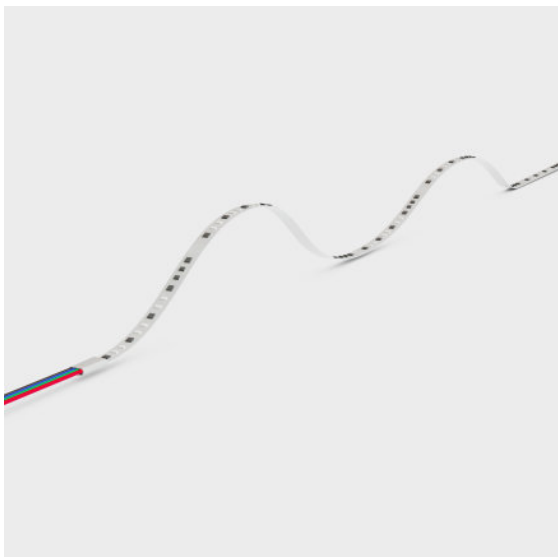

### Caratteristiche prodotto

- Striscia LED flessibile e tagliabile
- Up to 50,000 hrs lifetime @ tc max

### Vantaggi prodotto

- Cambiamento uniforme del colore
- Facile installazione su molte superfici lisce grazie al nastro autoadesivo sul lato posteriore

### Aree applicative

- Illuminazione d'effetto nell'architettura



## Scheda della famiglia di prodotto

### Dati tecnici

#### Dati elettrici

Descrizione del prodotto	Tensione nominale	Tipo di corrente	Potenza di costruzione	Gamma di tensione	Accidental reverse input voltage protection up to
TF400RGB -G1-05	24,0 V	DC	48,50 W	23...25 V	25 V

#### Dati fotometrici


Descrizione del prodotto	Tonalità di luce del LED	Efficienza luminosa	Colore della luce (descrizione)
TF400RGB -G1-05	RGB	33,3 lm/W	Rosso/Verde/ Blu

#### Dimensioni e peso

Descrizione del prodotto	Lunghezza	Peso prodotto
TF400RGB -G1-05	5000,0 mm	65,00 g

## Scheda della famiglia di prodotto

### Disegno con quote

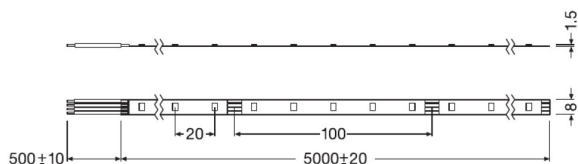

TF400RGB -G1-05

### Temperature e condizioni di utilizzo

Descrizione del prodotto	Temperatura di funzionamento	Temperatura di stoccaggio
TF400RGB -G1-05	-25...80 °C	-30...85 °C

### Dati di prodotto aggiuntivi

Descrizione del prodotto	ID of contained light source [AGGR]
TF400RGB -G1-05	LS_SHZ_600468

### Certificati, Norme, Direttive

Descrizione del prodotto	Energy efficiency class of the contained light source
TF400RGB -G1-05	G

## Scheda della famiglia di prodotto

### Dati logistici

Descrizione del prodotto	Codice prodotto di base
TF400RGB -G1-05	853951000000

### Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Descrizione del prodotto	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
TF400RGB -G1-05	10-03-2023	4062172154284	Lead

Descrizione del prodotto	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
TF400RGB -G1-05	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	565a8c97-5409-4822-af13-ada408823fd9

### Apparecchiatura / Accessori

- Connessione più semplice con il sistema opzionale CONNECTsystem





### Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica




### Supporto tecnico e di vendita

Supporto tecnico e di vendita [www.osram.it](http://www.osram.it)

### Download dati

File
 User instruction TEC Flex Tunable White, TEC Flex RGB
 Product Datasheet TEC Flex RGB IP00 Product Datasheet, EN
 Brochure Light is strong - Discover the versatile and flexible lighting system OSRAM 24V TEC Flex (EN)
 Certificati TEC Flex RGB CE 4239858 210820

## Scheda della famiglia di prodotto


	Certificati TF(P)RGB ENEC 35-115144 140920
	Eulumdat Eulumdat TF400RGB-LDT
	IES data Eulumdat TF400RGB-IES

### Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015. The contained light source is intended for use in applications requiring high-quality coloured light.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

### Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4062172154284	TF400RGB -G1-05	Cartone di spedizione 10	225 mm x 240 mm x 120 mm	6.48 dm <sup>3</sup>	1304.00 g

1)  codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

### Accessori opzionali

Descrizione del prodotto	Nome dell'accessorio	Codice dell'accessorio
TF400RGB -G1-05	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
TF400RGB -G1-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676

## Scheda della famiglia di prodotto

TF400RGB -G1-05	CONN-FLEX -4P-050 KIT 10PCS	▶ 4062172179744
TF400RGB -G1-05	CONN-FLEX -4P-200 KIT 10PCS	▶ 4062172179768
TF400RGB -G1-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TF400RGB -G1-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TF400RGB -G1-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TF400RGB -G1-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TF400RGB -G1-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TF400RGB -G1-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TF400RGB -G1-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TF400RGB -G1-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TF400RGB -G1-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TF400RGB -G1-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

---

### Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.