

TEC Flex Protect IP66 Connector

Accessories for Flexible LED strips

Caratteristiche prodotto

- Quick and easy installation
- Compatible with TEC Flex



Vantaggi prodotto

- Installazione facile senza necessità di utensili o saldatura (CONNECTsystem)
- Tempo di installazione ridotto (CONNECTsystem)
- Può essere collegato all'estremità del modulo o in corrispondenza dei punti di sezionamento (CONNECTsystem)
- Piatto (CONNECTsystem)


Scheda della famiglia di prodotto

Dati tecnici


Descrizione del prodotto	Dimensioni e peso		Dati di prodotto aggiuntivi		Dati logistici
	Lunghezza	Peso prodotto	EAN sostitutivo	EAN sostitutivo	Codice prodotto di base
FX -SC08-G2-C2PF-IP54-0500	510,0 mm	8,30 g	4052899533516		85444290900
FX -SC08-G2--BTJ-IP54	30,0 mm	4,00 g	4052899464919	4052899568853	85444290900
FX -SC08-G2-CT4PJ	9,0 mm	0,80 g			85366990990

Descrizione del prodotto	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
FX -SC08-G2-C2PF-IP54-0500	12-02-2022	4052899464889 4052899488236	No declarable substances contained	In work
FX -SC08-G2--BTJ-IP54	12-02-2022	4052899464919 4052899568853	No declarable substances contained	In work
FX -SC08-G2-CT4PJ	30-08-2022	4052899464858	No declarable substances contained	No declarable substances contained


Scheda della famiglia di prodotto

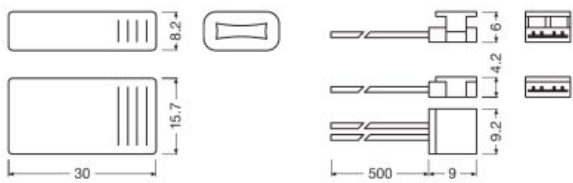


343564_SLMCONNECTsystem FLEX, LF-2PIN Flex IP SC

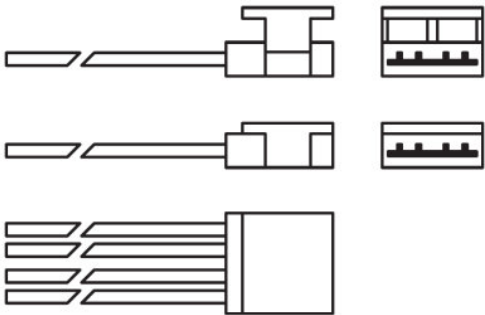


343569_SLMCONNECTsystem FLEX, LF-4PIN Flex SC

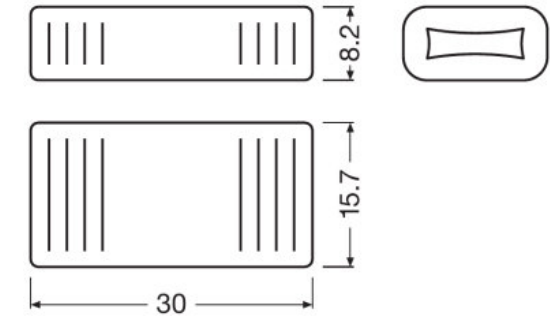


343555_SLMCONNECTsystem FLEX, LF-CONN Flex IP SC

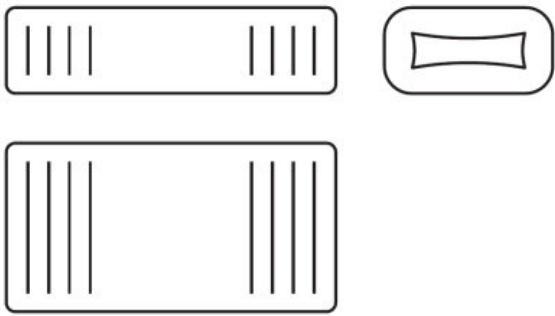

343578_SLMCONNECTsystem FLEX, LF-CONN Flex IP SC




729184_ACC LECV LF B2B Conn. 12,7 5 3 G2



729196_ACC LECV LF B2B Conn. 12,7 5 3 G2

Scheda della famiglia di prodotto



729327_FX-SC08-G2_CT4PJ 50XFS25

Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica

Supporto tecnico e di vendita

Supporto tecnico e di vendita www.osram.it

Download dati

File	
	Brochure Light is freedom of design (EN)
	User instruction Connection System for LINEARlight Flex & TEC Flex IP00
	Product Datasheet 726951_SLIMCONNECT SYSTEM 08 G2

Scheda della famiglia di prodotto

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4052899464889	FX -SC08-G2-C2PF-IP54-0500	Cartone di spedizione 280	510 mm x 340 mm x 315 mm	54.62 dm ³	5897.00 g
4052899568853	FX -SC08-G2--BTJ-IP54	Cartone di spedizione 250	258 mm x 168 mm x 84 mm	3.64 dm ³	1132.00 g
4052899464858	FX -SC08-G2-CT4PJ	Cartone di spedizione 1250	510 mm x 340 mm x 315 mm	54.62 dm ³	3914.00 g

1)  codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.