

Corner surface slim profile 19x19 mm

Accessories for Flexible LED strips

Caratteristiche prodotto

- Compatible with TEC Flex



Vantaggi prodotto

- Profilo di alluminio robusto e resistente alla corrosione grazie all'anodizzazione


Scheda della famiglia di prodotto

Dati tecnici


	Dimensioni e peso		Dati logistici	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
Descrizione del prodotto	Lunghezza	Peso prodotto	Codice prodotto di base	Date of Declaration
FX-QMS-G1 -EFGP-T45D19H19	26,0 mm	0,80 g	39269097900	30-08-2022
FX-QMS-G1 -BMZI-T45D19H19	200 mm	143 g	76169990990	30-08-2022
FX-QMS-G1 -EFGH-T45D19H19	190 mm	100 g	39269097900	11-02-2022
FX-QMS-G1 -CFDB-300	3000 mm	51,75 g	39169050900	30-08-2022
FX-QMS-G1 -CFTL-300	3000 mm	5850 g	39269097900	11-02-2022

Descrizione del prodotto	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
FX-QMS-G1 -EFGP-T45D19H19	4052899450028	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -BMZI-T45D19H19	4052899446960	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -EFGH-T45D19H19	4052899999862	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFDB-300	4052899446991	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFTL-300	4052899999749	No declarable substances contained	No declarable substances contained


Scheda della famiglia di prodotto

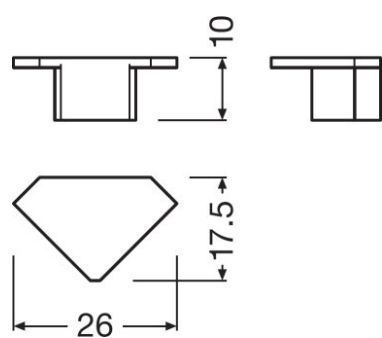


729009_FX-QMS-G1-EFGP-T45D19H19

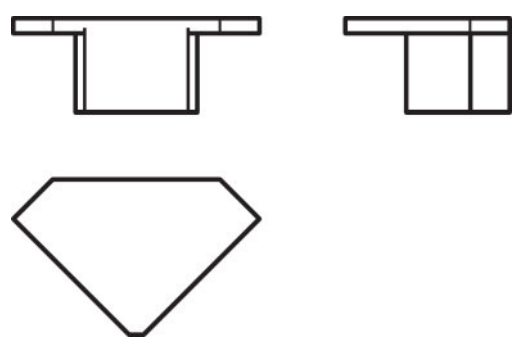

729077_FX-QMS-G1-EFGP-T45D19H19

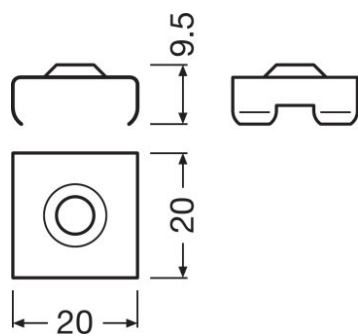

729003_FX-QMS-G1-BMZI-T45D19H19

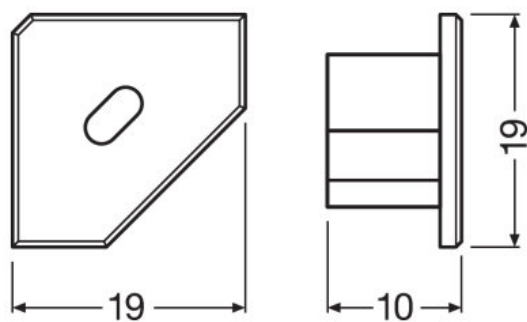

FX-QMS-G1-EFGH-T45D19H19




729001_FX-QMS-G1-CFDB-300



729069_FX-QMS-G1-CFDB-300

Scheda della famiglia di prodotto



FX-QMS-G1-CFTL-300

Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica

Supporto tecnico e di vendita

Supporto tecnico e di vendita www.osram.it

Download dati

File	
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-T45D19H19-300 (EN)
	Brochure Light is freedom of design (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6W3-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12LS-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12-300 (EN)
	Product Datasheet Specification Sheet Wide Profile FX-QMS-G1-TR19H16-300

Scheda della famiglia di prodotto

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4052899450028	FX-QMS-G1 -EFGP-T45D19H19	Cartone di spedizione 400	175 mm x 145 mm x 110 mm	2.79 dm ³	426.00 g
4052899446960	FX-QMS-G1 -BMZI-T45D19H19	Cartone di spedizione 400	175 mm x 145 mm x 110 mm	2.79 dm ³	676.00 g
4052899999862	FX-QMS-G1 -EFGH-T45D19H19	Cartone di spedizione 400	175 mm x 145 mm x 100 mm	2.54 dm ³	506.00 g
4052899446991	FX-QMS-G1 -CFDB-300	Cartone di spedizione 40	3060 mm x 225 mm x 225 mm	154.91 dm ³	3293.00 g
4052899999749	FX-QMS-G1 -CFTL-300	Cartone di spedizione 40	3020 mm x 80 mm x 30 mm	7.25 dm ³	2880.00 g

1)☒ codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.