

## Surface slim profile 12x16 mm

Accessories for Flexible LED strips

### Caratteristiche prodotto

- Compatible with TEC Flex



### Vantaggi prodotto

- Profilo di alluminio robusto e resistente alla corrosione grazie all'anodizzazione


Scheda della famiglia di prodotto

Dati tecnici


|                          | Dimensioni e peso |               | Dati logistici          | Environmental information<br>Information according Art. 33 of<br>EU Regulation (EC) 1907/2006 (REACH) |
|--------------------------|-------------------|---------------|-------------------------|-------------------------------------------------------------------------------------------------------|
| Descrizione del prodotto | Lunghezza         | Peso prodotto | Codice prodotto di base | Date of Declaration                                                                                   |
| FX-QMS-G1 -TU16H12-300   | 3000 mm           | 420,00 g      | 76042990900             | 30-08-2022                                                                                            |
| FX-QMS-G1 -CFDB-300      | 3000 mm           | 51,75 g       | 39169050900             | 30-08-2022                                                                                            |
| FX-QMS-G1 -CFTL-300      | 3000 mm           | 58,50 g       | 39269097900             | 11-02-2022                                                                                            |

| Descrizione del prodotto | Primary Article Identifier | Candidate List Substance 1         | Declaration No. in SCIP database   |
|--------------------------|----------------------------|------------------------------------|------------------------------------|
| FX-QMS-G1 -TU16H12-300   | 4052899448964              | No declarable substances contained | No declarable substances contained |
| FX-QMS-G1 -CFDB-300      | 4052899446991              | No declarable substances contained | No declarable substances contained |
| FX-QMS-G1 -CFTL-300      | 4052899999749              | No declarable substances contained | No declarable substances contained |


Scheda della famiglia di prodotto

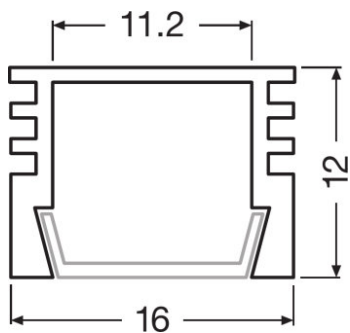


728418\_TU16H12




730228\_FX-QMS-G1-TU16H12-300

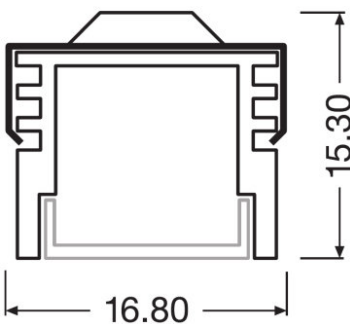


TU16H12 profile + bracket



TU16H12 profile + tiltable bracket

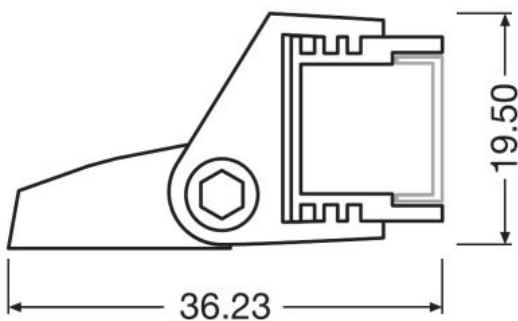


TU16H12 profile + tiltable bracket 90°

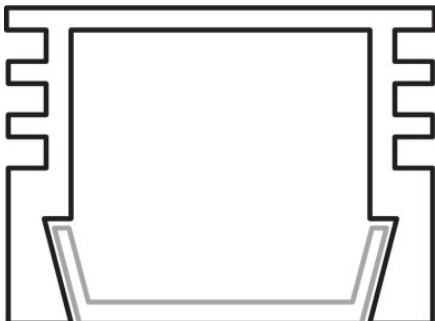


728450\_TU16H12


Scheda della famiglia di prodotto




730234\_FX-QMS-G1-TU16H12-300

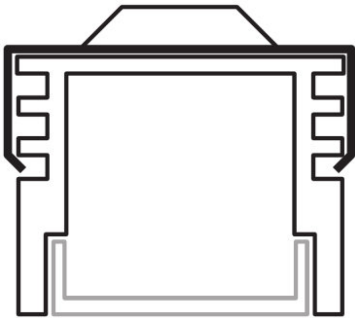


TU16H12 profile + bracket



TU16H12 profile + tiltable bracket

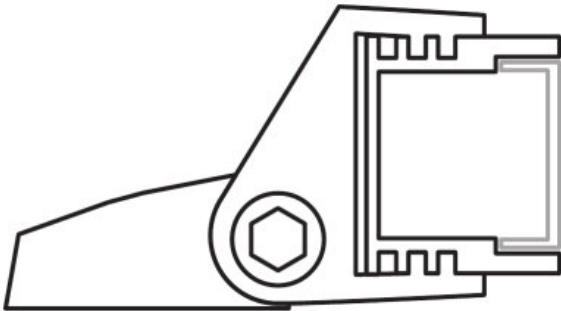

TU16H12 profile + tiltable bracket 90°




729001\_FX-QMS-G1-CFDB-300



729069\_FX-QMS-G1-CFDB-300

Scheda della famiglia di prodotto



FX-QMS-G1-CFTL-300

Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica

Supporto tecnico e di vendita

Supporto tecnico e di vendita [www.osram.it](http://www.osram.it)

Download dati

| File                                                                                |                                                                                  |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|  | Product Datasheet<br>Specification Sheet_Slim Track FX-QMS-G1-TU16H12-300 (EN)   |
|  | Brochure<br>Light is freedom of design (EN)                                      |
|  | Dati CAD<br>CAD file slim profile TU16H12                                        |
|  | Eulumdat<br>Eulumdat_FX-QMS-G1-TU16H12-300_CFDL                                  |
|  | Eulumdat<br>Eulumdat_FX-QMS-G1-TU16H12-300_CFDB                                  |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-T45D19H19-300 (EN) |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU15H6-300 (EN)    |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU15H6W3-300 (EN)  |
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU16H12LS-300 (EN) |

Scheda della famiglia di prodotto

|                                                                                   |                                                                                  |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|  | Product Datasheet<br>Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN) |
|  | Product Datasheet<br>Specification Sheet Wide Profile FX-QMS-G1-TR19H16-300      |

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dati logistici

| Codice prodotto | Descrizione del prodotto | Unità di imballo (Pezzi/unità) | Dimensioni (lunghezza x profondità x altezza) | Volume                 | Peso lordo |
|-----------------|--------------------------|--------------------------------|-----------------------------------------------|------------------------|------------|
| 4052899448964   | FX-QMS-G1 -TU16H12-300   | Cartone di spedizione<br>20    | 3020 mm x 100 mm x 100 mm                     | 30.20 dm <sup>3</sup>  | 9420.00 g  |
| 4052899446991   | FX-QMS-G1 -CFDB-300      | Cartone di spedizione<br>40    | 3060 mm x 225 mm x 225 mm                     | 154.91 dm <sup>3</sup> | 3293.00 g  |
| 4052899999749   | FX-QMS-G1 -CFTL-300      | Cartone di spedizione<br>40    | 3020 mm x 80 mm x 30 mm                       | 7.25 dm <sup>3</sup>   | 2880.00 g  |

1)  codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

Accessori opzionali

| Descrizione del prodotto | Nome dell'accessorio | Codice dell'accessorio                                                                              |
|--------------------------|----------------------|-----------------------------------------------------------------------------------------------------|
| FX-QMS-G1 -TU16H12-300   | FX-QMS-G1 -CFDB-300  |  4052899446991 |

Scheda della famiglia di prodotto

|                        |                     |                 |
|------------------------|---------------------|-----------------|
| FX-QMS-G1 -TU16H12-300 | FX-QMS-G1 -CFTL-300 | ▶ 4052899999749 |
|------------------------|---------------------|-----------------|

Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.