

FX-QMS-G1 -TU16H12W3-300

Recessed slim profile 16x12mm | Accessories for Flexible LED strips

Caratteristiche prodotto

- Compatible with TEC Flex




Vantaggi prodotto

- Profilo di alluminio robusto e resistente alla corrosione grazie all'anodizzazione

Scheda prodotto

Dati tecnici

Dimensioni e peso

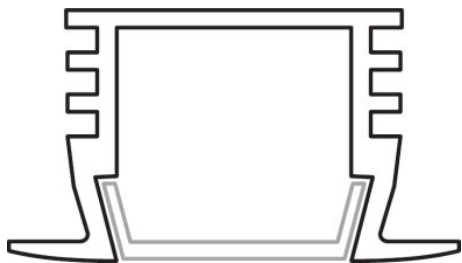

Lunghezza	3000 mm
Peso prodotto	468,00 g
Larghezza	16,0 mm
Altezza	12,0 mm

Dati logistici

Codice prodotto di base	76042990900
-------------------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	30-08-2022
Primary Article Identifier	4052899448988
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Download dati

File	
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN)
	Brochure Light is freedom of design (EN)
	Dati CAD CAD file slim profile TU16H12W3

Scheda prodotto

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4052899448988	FX-QMS-G1 - TU16H12W3-300	Cartone di spedizione 20	3020 mm x 100 mm x 100 mm	30.20 dm ³	10380.00 g

1)☒ codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

Accessori opzionali

Descrizione del prodotto	Nome dell'accessorio	Codice dell'accessorio
FX-QMS-G1 -TU16H12W3-300	FX-QMS-G1 -CFDB-300	▶ 4052899446991
FX-QMS-G1 -TU16H12W3-300	FX-QMS-G1 -CFTL-300	▶ 4052899999749

Clausola

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.