

## LINEARlight Rigid FINESSE InGround



### Caratteristiche prodotto

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67
- Luminous flux: > 2000 lm/m; 1200 m/m; 900 lm/m
- Color uniformity  $\leq 2$  SDCM
- Lifetime up to 60.000 h L80B10
- Large selection of lighting color temperatures

### Vantaggi prodotto

- 3 lengths available to adapt to different conditions
- External metal case available
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products

### Aree applicative

- Wall washing
- Wall Grazing
- Architectural integration



## Scheda della famiglia di prodotto

### Dati tecnici

Descrizione del prodotto	Dati elettrici			Dati illuminotecnici	Informazioni sul modulo LED	Dimensioni e peso
	Accidental reverse input voltage protection up to	Tipo di corrente	Gamma di tensione	LED pitch	Numero di LED per unità più piccola	Lunghezza del cavo
LR-P-1500 -RGBW830-120DBK06IGG1L	25 V	DC	23...25 V	16.67 mm	72	250,0
LR-P-2000 -927-120D-BK-06-IG-G1 L1	25 V	DC	23...25 V	14.29 mm	42	250,0
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	25 V	DC	23...25 V	16.67 mm	36	250,0
LR-P-2000 -927-10S-BK-06-IG-G1 L1	25 V	DC	23...25 V	14.29 mm	42	250,0
LR-P-2000 -927-10H-BK-06-IG-G1 L1	25 V	DC	23...25 V	14.29 mm	42	250,0
LR-P-2000 -927-10S-BK-12-IG-G1 L1	25 V	DC	23...25 V	14.29 mm	84	250,0
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	25 V	DC	23...25 V	16.67 mm	72	250,0
LR-P-2000 -927-10H-BK-12-IG-G1 L1	25 V	DC	23...25 V	14.29 mm	84	250,0
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	25 V	DC	23...25 V	16.67 mm	144	250,0
LR-P-2000 -927-120D-BK-12-IG-G1 L1	25 V	DC	23...25 V	14.29 mm	84	250,0

Descrizione del prodotto	Temperature e condizioni di utilizzo	Durata		Caratteristiche
	Temperatura di stoccaggio	Related Lifetime L90B10	Related Lifetime L80B10	With connection set
LR-P-1500 -RGBW830-120DBK06IGG1L	-20...85 °C	60000 h	60000 h	No
LR-P-2000 -927-120D-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-2000 -927-10S-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-2000 -927-10H-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-2000 -927-10S-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-2000 -927-10H-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	No
LR-P-2000 -927-120D-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	No

## Scheda della famiglia di prodotto

Descrizione del prodotto	With end piece	Certificati, Norme, Direttive	Dati logistici
		Norme	Codice prodotto di base
LR-P-1500 -RGBW830-120DBK06IGG1L	No	CE/ENEC	940511909000
LR-P-2000 -927-120D-BK-06-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-2000 -927-10S-BK-06-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-2000 -927-10H-BK-06-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-2000 -927-10S-BK-12-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-2000 -927-10H-BK-12-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	No	CE/ENEC	940511909000
LR-P-2000 -927-120D-BK-12-IG-G1 L1	No	CE/ENEC	940511909000

Descrizione del prodotto	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
LR-P-1500 -RGBW830-120DBK06IGG1L	02-12-2022	4062172307765	In work
LR-P-2000 -927-120D-BK-06-IG-G1 L1	02-12-2022	4062172325646	In work
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	02-12-2022	4062172325684	In work
LR-P-2000 -927-10S-BK-06-IG-G1 L1	02-12-2022	4062172325608	In work
LR-P-2000 -927-10H-BK-06-IG-G1 L1	02-12-2022	4062172325561	In work
LR-P-2000 -927-10S-BK-12-IG-G1 L1	02-12-2022	4062172325622	In work
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	02-12-2022	4062172325707	In work
LR-P-2000 -927-10H-BK-12-IG-G1 L1	02-12-2022	4062172325585	In work
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	02-12-2022	4062172325547	In work
LR-P-2000 -927-120D-BK-12-IG-G1 L1	02-12-2022	4062172325660	In work

## Scheda della famiglia di prodotto




LR FINESS In Ground Line Drawings



LR FINESS In Ground Line Drawings



LR FINESS In Ground Line Drawings

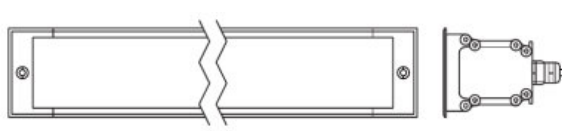

LR FINESS In Ground Line Drawings



### Consigli di applicazione

Per informazioni più dettagliate e grafici consultare la scheda tecnica

### Supporto tecnico e di vendita

Supporto tecnico e di vendita [www.osram.it](http://www.osram.it)

### Download dati

File	
	User instruction LINEARlight Rigid FINESS In Ground
	Product Datasheet LINEARlight RIGID FINESS InGround Specification Sheet

## Scheda della famiglia di prodotto



Brochure  
Light is awesome - LINEARlight Rigid FINESSE (EN)

### Dati logistici

Codice prodotto	Descrizione del prodotto	Unità di imballo (Pezzi/unità)	Dimensioni (lunghezza x profondità x altezza)	Volume	Peso lordo
4062172307765	LR-P-1500 -RGBW830-120DBK06IGG1L	Cartone di spedizione 1	780 mm x 180 mm x 140 mm	19.66 dm <sup>3</sup>	2920.00 g
4062172325646	LR-P-2000 -927-120D-BK-06-IG-G1 L1	Cartone di spedizione 1	780 mm x 180 mm x 140 mm	19.66 dm <sup>3</sup>	2920.00 g
4062172325684	LR-P-400 -RGB-120D-BK-06-IG-G1 L1	Cartone di spedizione 1	780 mm x 180 mm x 140 mm	19.66 dm <sup>3</sup>	2920.00 g
4062172325608	LR-P-2000 -927-10S-BK-06-IG-G1 L1	Cartone di spedizione 1	780 mm x 180 mm x 140 mm	19.66 dm <sup>3</sup>	2920.00 g
4062172325561	LR-P-2000 -927-10H-BK-06-IG-G1 L1	Cartone di spedizione 1	780 mm x 180 mm x 140 mm	19.66 dm <sup>3</sup>	2920.00 g
4062172325622	LR-P-2000 -927-10S-BK-12-IG-G1 L1	Cartone di spedizione 1	1380 mm x 180 mm x 140 mm	34.78 dm <sup>3</sup>	1150.00 g
4062172325707	LR-P-400 -RGB-120D-BK-12-IG-G1 L1	Cartone di spedizione 1	1380 mm x 180 mm x 140 mm	34.78 dm <sup>3</sup>	1150.00 g
4062172325585	LR-P-2000 -927-10H-BK-12-IG-G1 L1	Cartone di spedizione 1	1380 mm x 180 mm x 140 mm	34.78 dm <sup>3</sup>	1150.00 g
4062172325547	LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	Cartone di spedizione 1	1380 mm x 180 mm x 140 mm	34.78 dm <sup>3</sup>	1150.00 g
4062172325660	LR-P-2000 -927-120D-BK-12-IG-G1 L1	Cartone di spedizione 1	1380 mm x 180 mm x 140 mm	34.78 dm <sup>3</sup>	1150.00 g

1)  codice prodotto indicato descrive la minore quantità che può essere ordinata. Una unità di spedizione può contenere uno o più di un singolo prodotto. Quando si inserisce un ordine, per la quantità inserire una o più unità di spedizione.

### Clausola

Con riserva di modifiche senza preavviso. Salvo errori o omissioni. Assicurarsi sempre di utilizzare la versione più recente.